

*No one does it
like you*

Canon

EXPECT QUALITY WITH SEAMLESS PERFORMANCE

The iR-ADV C7500i II provides you with transparency and control – putting you in the driver's seat and allowing you to manage projects with ease in the office or on the go. Expect consistent, quality output with advanced printing and finishing capabilities.

imageRUNNER ADVANCE C7500i II Performance Series

- Outstanding print quality with V2 colour and 2,400 dpi
- Finish with a range of production options
- Print paper weight up to 300gsm
- Track, report and control usage



MOBILITY

Connect on-the-go

- Communicate remotely through WiFi, Bluetooth* and NFC*
- Give your team flexibility so projects don't need to stop just because they are away from the office
- Intuitive printing and scanning using Canon PRINT Business plus built in support for Apple® AirPrint®, Mopria™ and Google Cloud™

*Optional



SECURITY

Protect sensitive information with enhanced security capabilities

- Advanced control over document access ensures documents are only seen by those that are authorised
- Functions used to monitor documents include user authentication, hard drive encryption, IPsec, port filtering capabilities and SSL technology
- The use of standard login management also means that tracking and reporting on various projects is feasible and can give insights into time and money spent on various projects



COST CONTROL

Advanced functions for big cost-saving

- Save your business money by reducing your paper wastage utilising settings such as forced job hold at the device, and blank page removal
- Enable print policies to monitor output while also restricting users from overuse
- Save even further with remote support to help diagnose and solve issues fast, rather than taking up the valuable time of in-house IT staff



Designed for a simple, tailored experience

- The large interface allows for easy navigation while My ADVANCE provides a personalised experience so you can customise your workflow in a way that works best for you
- Video guidance to help with basic maintenance
- Speed up processes with the single-pass document feeder and automatic blank page removal
- Achieve outstanding results with V2 imaging technology (V2 colour and true 2400dpi) and a range of finishing options including stapling, booklet, staple on-demand and eco staple

Systems seamlessly converge for smooth operation and easy handling

- Canon's MEAP platform works to integrate both new and existing document, capture and output management systems while being partnered with relevant support technology
- Collaborate with key line of business applications and external systems
- For smooth, hassle-free projects, scan and convert to Microsoft® Word and PowerPoint® files
- Supports integration with popular cloud services like Google Drive and Box*

Environmentally conscious technology works to achieve green initiatives for your business

- The iR-ADV C7500i II runs efficiently to help eliminate unnecessary power consumption and is designed to reduce emissions
- Motion sensors, sleep recovery triggers, 100% recycled plastics, and remote shutdown are all features that contribute to ongoing sustainability
- Minimise paper wastage with default print settings including double-sided print and black and white
- ENERGY STAR® and Blue Angel qualified with class leading Typical Electricity Consumption (TEC) rating

* Requires uniFLOW Online Express or uniFLOW Online subscription

CONFIGURATION

Staple Finisher

- 3-Tray, 3,500-sheet capacity (A4, B5, A5R) 1,750-sheet capacity (A3, B4, A4R, B5R)
- Corner and double stapling up to 65 sheets (80 gsm)
- Supports Eco stapling 4 sheets (80 gsm) and Staple On Demand 65 sheets (80 gsm)
- Supports optional internal 2/3 and 2/4 hole inner punchers

Booklet Finisher


- 3-Tray, 3,500-sheet capacity (A4, B5, A5R) 1,750-sheet capacity (A3, B4, A4R, B5R)
- Corner and double stapling up to 65 sheets (80 gsm)
- Booklet-making up to 20 sheets and non-staple saddle folded capacity up to 5 sheets
- Supports Eco stapling 4 sheets (80 gsm) and Staple On Demand 65 sheets (80 gsm)
- Supports optional internal 2/3 and 2/4 hole inner punchers

Document Insertion Unit

- Insert preprinted sheets
- Up to A3
- One tray
- 100-sheet total

Document Insertion / Folding Unit

- Insert, C-fold and Z-fold preprinted sheets
- Up to A3
- One tray
- 100-sheet total

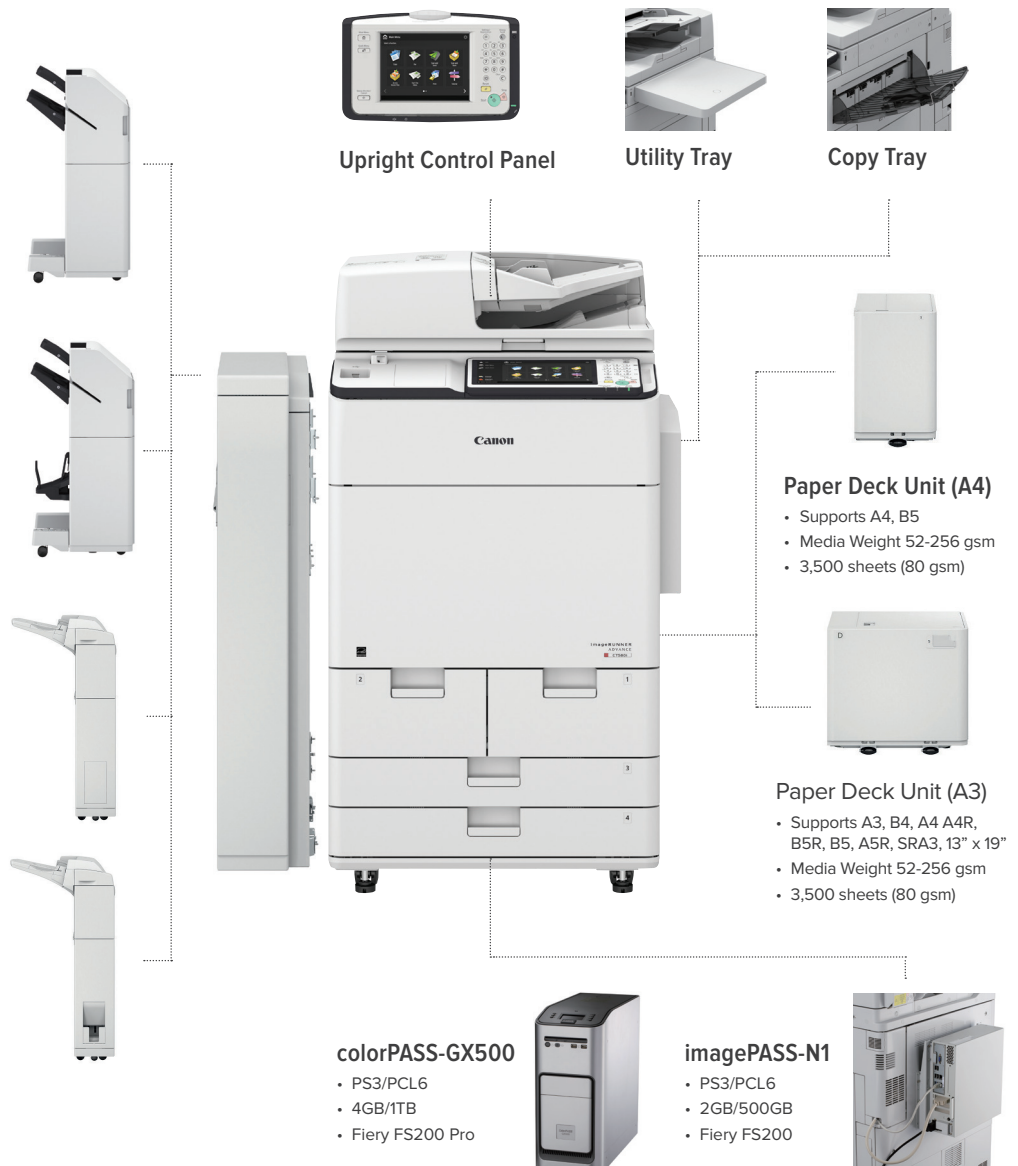

Upright Control Panel



Utility Tray



Copy Tray



Paper Deck Unit (A4)

- Supports A4, B5
- Media Weight 52-256 gsm
- 3,500 sheets (80 gsm)



Paper Deck Unit (A3)

- Supports A3, B4, A4 A4R, B5R, B5, A5R, SRA3, 13" x 19"
- Media Weight 52-256 gsm
- 3,500 sheets (80 gsm)

colorPASS-GX500

- PS3/PCL6
- 4GB/1TB
- Fiery FS200 Pro



imagePASS-N1

- PS3/PCL6
- 2GB/500GB
- Fiery FS200



imageRUNNER ADVANCE C7500i II Performance Series SPECIFICATIONS



Main Unit

| | |
|-------------------------------|--|
| Type | Colour Laser Multifunction |
| Core Function | Print, Copy, Scan, Send, Store and Optional Fax |
| Processor | Canon Dual Custom Processor (Shared) |
| Control Panel | Standard: 25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touchpanel Optional: 26.4 cm (10.4 inch) TFT LCD SVGA Colour Uprightpanel |
| Memory | Standard: 4GB RAM |
| Hard Disk Drive | Standard: 250GB Maximum: 1TB |
| Mirroring Hard Disk Drive | Optional: 250GB, 1TB |
| Interface Connection | Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Others: Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device) Optional: Serial Interface, Copy Control Interface |
| Paper Capacity (80gsm) | Standard: 3,500 Sheets Maximum: 6,800 Sheets |
| Paper Sources (80gsm) | Standard: Two 1,100-sheet Paper Deck, Two 550-sheet Paper Cassettes 250-sheet Multi-Purpose Tray Optional: 3,500-sheet Paper Deck (Paper Deck Unit-E1) 3,500-sheet Paper Deck (Pod Deck Lite-C1) Maximum: 6,800 Sheets (With Pod Deck Lite-C1) |
| Paper Output Capacity (80gsm) | Standard: 250 Sheets Maximum: 3,450 Sheets |
| Finishing Capabilities | Standard: Collate, Group With External Finisher: Collate, Group, Offset, Staple, Booklet (Booklet Finisher-V2), Hole Punch (2/3 Hole Puncher Unit-A1), Staple-Free Staple and Staple On Demand (Necessary for Staple Finisher-V2 or Booklet Finisher-V2), Document Insertion (Insertion Unit-Q1 or Document Insertion/Folding Unit-K1), Z-Fold (Document Insertion/Folding Unit-K1) |
| Supported Media Types | Upper Left/Right Cassettes(1/2): Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Transparency, Bond paper, Letterhead Lower Cassettes (3/4): Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Transparency, Tab paper, Bond paper, Envelope, Letterhead Multi-Purpose Tray: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Textured paper, Transparency, Tracing paper, Label, Tab paper, Bond paper, Coated paper, Envelope, Letterhead Paper Deck Unit-E1: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Bond paper, Letterhead Pod Deck Lite-C1: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Textured paper, Transparency, Tracing paper, Label, Tab paper, Bond paper, Coated paper, Envelope, Letterhead |
| Supported Media Sizes | Upper Left/Right Deck (1/2): Standard Size: A4, B5 Lower Cassettes (3/4): Standard Size: A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13"x19" (330 mm x 483 mm), Envelope (No.10 (COM10), Monarch, ISO-C5, DL) Free Size: 139.7 mm x 182 mm to 330.2 mm x 487.7 mm, Custom Size: 139.7 mm x 182 mm to 330.2 mm x 487.7 mm, Envelope Custom Size: 98 mm x 148 mm to 330.2 mm x 487.7 mm Multi-Purpose Tray: Standard Size: A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13"x19" (330 mm x 483 mm), Custom Size: 100.0 mm x 148.0 mm to 330.2 mm x 487.7 mm, Free Size: 100 mm x 182 mm to 330.2 mm x 487.7 mm, Envelopes: No.10 (COM10), Monarch, ISO-C5, DL *Envelope specification, Size: Short-edge feed: No.10 (COM10), Monarch, ISO-C5, DL envelope, Custom Size: 90 mm x 148 mm to 330.2 mm x 487.7 mm Paper Deck Unit-E1: A4, B5 Pod Deck Lite-C1: A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13"x19" (330 mm x 483 mm), Envelopes: (No.10 (COM10), Monarch, ISO-C5, DL) Custom Size: 139.7 mm x 148 mm to 330.2 mm x 487.7 mm |
| Supported Media Weights | Upper Cassettes: 52 to 220 gsm Lower Cassettes: 52 to 256 gsm Multi-Purpose Tray: 52 to 300 gsm Duplex: 52 to 220 gsm |
| Warm-up Time | From Power On: 30 Seconds or Less (Time between device power-on and when the start key is enabled (print reservation)) From Deep Sleep Mode: 30 Seconds or Less Quick Startup Mode: 4 seconds or less |
| Dimensions (W x D x H) | 689 mm x 941 mm x 1,220 mm |
| Installation Space (W x D) | Basic: 1,913 mm x 1,524 mm (when Stack Bypass open + Booklet Finisher-V2) Fully Configured: 2,252 mm x 1,524 mm (when Pod Deck Lite-C1 + Document Insertion/Folding Unit-K1 + Booklet Finisher-V2) |
| Weight* | Approx. 272kg *Including ADF and the toner bottle |

Print Specifications

| | |
|----------------------------|--|
| Printing Method | Colour laser beam printing |
| Print Speed (BW/Colour) | IR-ADV C7580i II: 80/70 ppm (A4), 40/35 ppm (A3), 56.6/49.5 ppm (A4R), 80/70 ppm (A5R) IR-ADV C7570i II: 70/65 ppm (A4), 35/32.5 ppm (A3), 49.5/46 ppm (A4R), 70/65 ppm (A5R) IR-ADV C7565i II: 65/60 ppm (A4), 32.5/30 ppm (A3), 46/42.4 ppm (A4R), 65/60 ppm (A5R) |
| Print Resolution* | 600 dpi x 600 dpi (Default), 1,200 dpi x 1,200 dpi (Up to) *Data processing resolution |
| Page Description Languages | UFR II, PCL6 (Standard) Adobe PS 3 (Option) |
| Double Sided Printing | Automatic (Standard) |
| Direct Print | Direct printing available from USB memory key, Advanced box, Remote UI and Web Access (Only PDF print from websites is supported) Supported File Types: PDF, TIFF, JPEG, EPS, XPS |
| Fonts | PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts** *Requires optional PCL International Font Set-A1 **Require optional Barcode Printing Kit-D1 PS fonts: 136 Roman |
| Operating System | UFR II: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.6.8 or later) PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10 PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.6.8 or later) PPD: MAC OS 91 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows8.1/Windows10 |

Copy Specifications

| | |
|---------------------------|---|
| Copy Speed (BW/Colour) | IR-ADV C7580i II: 80/70 ppm (A4), 40/35 ppm (A3), 56.6/49.5 ppm (A4R), 80/70 ppm (A5R) IR-ADV C7570i II: 70/65 ppm (A4), 35/32.5 ppm (A3), 49.5/46 ppm (A4R), 70/65 ppm (A5R) IR-ADV C7565i II: 65/60 ppm (A4), 32.5/30 ppm (A3), 46/42.4 ppm (A4R), 65/60 ppm (A5R) |
| *First-Copy-Out Time (A4) | IR-ADV C7580i II: Approx. 4.4 seconds or less (BW), Approx. 5.4 seconds or less (CL) IR-ADV C7570i II: Approx. 4.8 seconds or less (BW), Approx. 5.9 seconds or less (CL) IR-ADV C7565i II: Approx. 4.8 seconds or less (BW), Approx. 5.9 seconds or less (CL) *20 °C to 30 °C Environment |
| Copy Resolution | Reading: 600 dpi x 600 dpi Printing: 1,200 dpi x 1,200 dpi* *Data processing resolution |

| | |
|-----------------------|--|
| Multiple Copies | Up to 9,999 copies |
| Copy Exposure | Automatic or Manual (11 Levels) |
| Magnification | 25% - 400% (1% Increments) |
| Preset Reductions | 25%, 50%, 61%, 70%, 81%, 86% |
| Preset Enlargements | 115%, 122%, 141%, 200%, 400% |
| Basic Copy Features | Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel |
| Special Copy Features | Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Print on Tab, Store in Mail Box, Superimpose Image, Copy ID Card, Detect Feeder Multi Sheet Feed. Free Size Original, Colour Balance, Adjust One-Touch Colour, Area Designation |

Scan Specifications

| | |
|---|--|
| Type | Colour Platen and Single-pass Duplexing Automatic Document Feeder |
| Document Feeder Paper Capacity | 300 Sheets (80 gsm) |
| Document Feeder Supported Media Sizes | A3, B4, A4R, A4, B5R, B5, A5R, A5, B6R |
| Document Feeder Supported Media Weights | Single-sided scanning: 38 to 220 gsm (BW) Single-sided scanning: 64 to 220 gsm (CL) Double-sided scanning: 50 to 220 gsm (BW) Double-sided scanning: 64 to 220 gsm (CL) |
| Pull Scan Spec | Colour Network ScanGear2. For both Twain and WIA Supported OS: Windows Vista/7/8/8.1/10 Server 2008/Server 2008 R2/Server 2012/Server 2012 R2 |
| Scan Resolution | 100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi |
| Platen Acceptable Originals | Platen: Sheet, Book, 3-Dimensional Objects (Up to 2kg) Feeder Size: A3, B4, A4R, A4, B5R, B5, A5R, A5, B6R |
| Scan Speed (A4) | Single-sided Scanning (BW): 120 ipm (300pi) / 120 ipm (600 dpi) Single-sided Scanning (CL): 120 ipm (300pi) / 70 ipm (600 dpi) Double-sided Scanning (BW): 240 ipm (300pi) / 150 ipm (600 dpi) Double-sided Scanning (CL): 220 ipm (300pi) / 90 ipm (600 dpi) |
| Double Sided Scanning | 2-sided to 2-sided (Automatic) |

Send Specifications

| | |
|------------------------|---|
| Optional/Standard | Standard on all models |
| Destination | E-mail/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 Fax (Optional), IP Fax (Optional) |
| Colour Mode | Automatic-Colour Select (Full Colour/Grayscale), Automatic-Colour Select (Full Colour/Black-and-White), Full Colour, Grayscale, and Black and White |
| Address Book | LDAP (2,000)/Local (1,600)/Speed dial (200) |
| Send Resolution | 100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi |
| Communication Protocol | File: FTP, SMB , WebDAV E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full) |
| File Format | Standard: TIFF, JPEG, PDF (Compact, Apply policy, Optimise for Web, PDF A/1-b), XPS (Compact) Optional: PDF (Searchable, Trace & Smooth, Encrypted), PDF/XPS (Digital Signature), Office Open XML (PowerPoint, Word), XPS (Searchable) |

Fax Specifications

| | |
|------------------------------------|--|
| Optional/Standard | Optional on all models |
| Maximum Number of Connection Lines | 4 |
| Modem Speed | Super G3: 33.6 kbps G3: 14.4 kbps |
| Compression Method | MH, MR, MMR, JBIG |
| Resolution | 400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi |
| Sending/Recording Size | A5 and A5R* to A3 *Sent as A4 |
| Fax Memory | Up to 30,000 pages |
| Speed Dials | Max. 200 |
| Group Dials/Destinations | Max. 199 dials |
| Sequential Broadcast | Max. 256 addresses |
| Memory Backup | Yes |

Store Specifications

| | |
|-----------------------------------|---|
| Mail Box (Number supported) | 100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored |
| Advanced Box | Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows Vista/7/8/8.1/10) Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions) |
| Advanced Box Available Disc Space | Approx. 16GB (Standard HDD) Approx. 480GB (1TB HDD) |
| Memory Media | Standard: USB Memory |

Security Specifications

| | |
|----------------|---|
| Authentication | Standard: Picture Login, DepartmentID Authentication, (Device and Function Level Log-in), Access Management System Optional: Universal Login Manager |
| Data | Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated) Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW) |
| Network | Standard: IP/MAC Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP |
| Document | Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration Optional: Encrypted PDF, Encrypted Secure Print, User and Device signatures, Secure Watermarks, Document Scan locking |

Environmental Specifications

| | |
|-----------------------|--|
| Operating Environment | Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (no condensation) |
| Power Requirements | IR-ADV C7565i II: 220-240 V (±10 %), 50/60 Hz (±2 Hz), 10 Amp IR-ADV C7570i II: 220-240 V (±10 %), 50/60 Hz (±2 Hz), 10 Amp IR-ADV C7580i II: 220-240 V (±10 %), 50/60 Hz (±2 Hz), 15 Amp |
| Power Consumption | Maximum: IR-ADV C7580i II 2.5 kW, IR-ADV C7570i II/C7565i II 2.0 kW Standby: Approx. 136.6 W (Reference Value) Sleep mode: Approx. 0.9 W (0.9W sleep mode is not available in all circumstances due to certain settings.) Typical Electricity Consumption (TEC) rating 5.6 kWh (IR-ADV C7580i II), 4.8 kWh (IR-ADV C7570i II), 4.5 kWh (IR-ADV C7565i II) |
| Standards | ENERGY STAR® Qualified |

| | |
|---------------------------------|--|
| Consumables | |
| Toner | NPG-72 TONER BK/C/M/Y |
| Software and Printer Management | |
| Remote Management Tools | IW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web-based interface to each device that helps to provide remote device management and control. |
| Scanning Software | Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device. |
| Optimisation Tools | Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers (Available via service only) NetSpot Device Installer: Simple utility software that allows you to make network protocol settings for Canon devices connected to your network. |
| Platform | MEAP (Multifunctional Embedded Application Platform): A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device. MEAP Web: Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services |
| Document Publishing | IW Desktop: Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorisation. |

Fiery Print Controller Specifications

| | |
|--|--|
| Optional/Standard | Optional on all models |
| Name | imagePASS-N1 (Embedded) and colorPASS-GX500 |
| Print Resolution | 1200 dpi x 1200 dpi, 600 dpi x 600 dpi |
| Standard Page Description Languages | Adobe PS3, PCL6 |
| Memory | 2 GB |
| Hard Disk Drive | 500 GB |
| Processor | Intel Celeron G1820 2.7GHz |
| System | Fiery FS200 |
| Fonts | PS: 138 Fonts PCL: 113 Fonts |
| Supported Operating Systems | Windows VISTA 32 and 64 bit / Windows 7 / 32 and 64 bit / Windows 8 32 and 64 bit / Windows 8.1 32 and 64 bit / Windows 10 32 and 64 bit / Windows Server 2008 32 and 64 bit / Windows Server 2008 R2 64 bit only / Windows Server 2012 64bit only / Windows Server 2012 R2 64bit only / MAC OS (10.7,10.8,10.9,10.10,10.11) |
| Interface | 2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear x 2), USB2.0 x 4 (Rear x 4) |
| Network Protocols | TCP/IP (LPR/ Port 9100/ SNMP / IPP / HTTP/HTTPS / SMB / FTP) / DNS |
| Direct Print | PDF1.7, EPS, TIFF6, JDF1.4/JMF(OP) |
| VDP | FreeForm2.1 |
| Fiery Print Controller Standard Features | Fiery Command WorkStation5 / Paper Catalog / Fiery Spot-On / Fiery Remote Scan / Hot Folders License |
| Fiery Print Controller Options | Fiery Impose / Fiery Compose / Fiery Impose and Compose / Productivity Package Web Activate (Include Fiery JDF) |
| Dimensions (W x D x H) | 215 mm x 483 mm x 485 mm |

Paper Supply Options

| | |
|------------------------|---|
| Name | Paper Deck Unit-E1 |
| Paper Capacity | 3,500 sheets (80 gsm) |
| Paper Size | A4, B5 |
| Paper Weight | 52 to 256 gsm |
| Power Source | From the Main Unit |
| Dimensions (W x D x H) | 363 mm x 630 mm x 572 mm |
| Weight | Approx. 34 kg |
| Name | Pod Deck Lite-C1 |
| Paper Capacity | 3,500 sheets (80 gsm) |
| Paper Size | A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13" x 19", Envelope (No.10 (COM10), Monarch, DL, ISO-C5) |
| Custom Size | 139.7 mm x 148.0 mm to 330.2 mm to 487.7 mm |
| Paper Weight | 52 to 300 gsm |
| Power Source | 220-240V/1.2A 50/60Hz |
| Dimensions (W x D x H) | 656 mm x 686 mm x 570 mm |
| Weight | Approx. 68 kg |

Output Options

| | |
|------------------------|---|
| Name | Copy Tray-R2 |
| Total Output Capacity | 250 sheets (80 gsm) |
| Paper Weight | 52 to 300 gsm |
| Paper Size | Standard Size: A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13"x19" (330 mm x 483 mm), Envelope (No.10 (COM10), Monarch, DL, ISO-C5), Custom Size: 100.0 mm x 148.0 mm to 330.2 mm x 487.7 mm Free Size: 100 mm x 182 mm to 330.2 mm x 487.7 mm Envelope Custom Size: 90 mm x 148 mm to 330.2 mm x 487.7 mm |
| Dimensions (W x D x H) | 420 mm x 382 mm x 175 mm (When attached with the Main Unit/When the Extension Tray is extended) |
| Weight | Approx. 1.1 kg |
| Name | Staple Finisher-V2 (External) |
| Number of Trays | 3 |
| Top Tray Capacity | A4/B5/A5R: 250 sheets, A3/B4/A4R/B5R: 125 sheets |
| Mid Tray Capacity | A4/B5/A5R: 250 sheets, A3/B4/A4R/B5R: 125 sheets |
| Lower Tray Capacity | A4/B5/A5R: 3,000 sheets, A3/B4/B5R/A4R/SRA3/13" x 19": 1,500 sheets |

| | |
|--------------------------------|---|
| Paper Weight | Top Tray: 52 to 256 gsm Mid Tray: 52 to 256 gsm Lower Tray: 52 to 300 gsm |
| Staple Position | Corner, Double |
| Staple Capacity | Corner staple and Double Staple: A4/B5: 65 sheets (52 to 90 gsm), A3/B4/A4R: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4: 5 sheets (52 to 64 gsm), 4 sheets (65 to 81.4 gsm), 3 sheets (81.5 to 105 gsm) Staple On Demand: 65 sheets (52 to 90 gsm) |
| Dimensions (W x D x H) | 656 mm x 623 mm x 1,195 mm (When the Extension Tray and Rotary Tray are extended) |
| Weight | Approx. 35 kg |
| Name | Booklet Finisher-V2 (External) |
| Number of Trays | 3 |
| Upper Tray Capacity | A4/B5/A5R: 250 sheets, A3/B4/A4R/B5R: 125 sheets |
| Mid Tray Capacity | A4/B5/A5R: 250 sheets, A3/B4/A4R/B5R: 125 sheets |
| Lower Tray Capacity | A4/B5/A5R: 3,000 sheets, A3/B4/B5R/A4R/SRA3/13" x 19": 1,500 sheets |
| Paper Weight | Top Tray: 52 to 256 gsm Mid Tray: 52 to 256 gsm Lower Tray: 52 to 300 gsm |
| Staple Position | Corner, Double |
| Staple Capacity | Corner staple and Double Staple: A4/B5: 65 sheets (52 to 90 gsm), A3/B4R/A4R: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4: 5 sheets (52 to 64 gsm), 4 sheets (65 to 81.4 gsm), 3 sheets (81.5 to 105 gsm) Staple On Demand: 65 sheets (52 to 90 gsm) |
| Booklet Stitch Paper Size | A3/B4/A4R, Custom Size: 195 mm x 270 mm to 304.8 mm x 457.2 mm |
| Booklet Stitch Staple Capacity | 20 sheets x 10 sets (81 gsm) (Including 1 cover sheet up to 256 gsm) |
| Dimensions (W x D x H) | 656 mm x 623 mm x 1,195 mm (When the Extension Tray and Rotary Tray are extended) |
| Weight | Approx. 58 kg |

| | |
|-------------------------|---|
| Name | Document Insertion Unit-Q1 (Requires either the Staple Finisher-V2 or Booklet Finisher-V2) |
| Number of Trays | 1 |
| Tray Capacity | 100 Sheets (80 gsm) |
| Acceptable Paper Weight | 60 to 256 gsm |
| Acceptable Paper Type | Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Textured paper, Bond paper, Coated paper, Tab paper, Letterhead |
| Acceptable Paper Sizes | A3/A4/A4R/B4/B5R/B5/SRA3/13" x 19" |
| Power Requirements | 100-240V/50/60Hz 1.0A |
| Dimensions (W x D x H) | 247 mm x 679 mm x 1,242 mm (Without Document Tray) |
| Dimensions (W x D x H) | 662 mm x 679 mm x 1,242 mm (With Insertion Feeding Tray) |
| Weight | Approx. 40 kg |
| Name | Document Insertion/Folding Unit-K1 (Requires either the Staple Finisher-V2 or Booklet Finisher-V2) |
| Number of Trays | 1 |
| Folding Type | Z-Fold, C-Fold |
| Acceptable Paper Weight | Z-Fold/C-Fold: 60 to 105 gsm Insertion Unit: 60 to 256 gsm |
| Acceptable Paper Type | Z-Fold/C-Fold: Thin paper, Plain paper, Colour paper, Recycled paper Insertion Unit: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Textured paper, Bond paper, Coated paper, Tab paper, Letterhead |
| Acceptable Paper Sizes | Z-Fold: A3/A4R/B4 C-Fold: A4R Insertion Unit: A3/A4/A4R/B4/B5R/B5/SRA3/13" x 19" |
| Power Requirements | 100-240V/50/60Hz 1.0A |
| Dimensions (W x D x H) | 247 mm x 679 mm x 1,242 mm (Without Document Tray) |
| Dimensions (W x D x H) | 662 mm x 679 mm x 1,242 mm (With Insertion Feeding Tray) |
| Weight | Approx. 76 kg |

Hardware Accessories

| | |
|--------------|--|
| Card Readers | MiCard Plus Proximity Card Reader, IC Card Reader Box-B1 |
| Others | Tab Feeding Attachment Kit-F1, Utility Tray-B1 |

Security Options

| | |
|-------------------|---|
| Document Security | Document Scan Lock Kit-B1, Secure Watermark-B1, Encrypted Secure Print Software-D1 |
| Data Security | HDD Mirroring Kit-J1, 2.5inch/250GB HDD-N1, 2.5inch/1TB HDD-P1, Removable HDD Kit-AL1 |

System and Controller Options

| | |
|------------------------------------|---|
| Print Accessories | PCL International Font Set-A1, PCL Asian Font Set-A1 |
| Barcode Printing | Barcode Printing Kit-D1 |
| EFI-Fiery Based Controller | imagePASS-N1, colorPASS-GX500 |
| EFI-Fiery Based Controller Options | Removable Hard Disk Drive Kit-B1, Fiery Impose, Fiery Compose, Fiery Impose and Compose |
| System Accessories | Web Access Software-K1, Serial Interface Kit-K3 |
| Fax Accessories | Super G3 Fax Board-AS1, Super G3 2nd Line Fax Board-AS1, Super G3 3rd/4th Line Fax Board-AS1, Remote Fax Kit-A1 |

Other Options

| | |
|---------------------------|--|
| Accessibility Accessories | ADF Access Handle-A1, Voice Guidance Kit-G1, Voice Operation Kit-D1 |
| Consumables | Stamp Ink Cartridge-C1, Staple-N1, Staple-P1, Staple Cartridge-X1, Staple Cartridge-Y1 |

For information and services contact

| | | |
|-------------------------|--------------|--------------|
| Canon Australia Pty Ltd | 1800 444 199 | canon.com.au |
| Canon New Zealand Ltd | 0800 222 666 | canon.co.nz |

